



HSP 2

Quick Guide
Kurzanleitung
Guide de démarrage rapide
Guia rápida
Instrucciones resumidas
Instruções resumidas
Beknopte gebruiksaanwijzing
Krótka instrukcja obsługi
Snabbguide

Kort vejledning
Pikaohje
Σύντομες οδηγίες
Kısa Kılavuz
Краткая инструкция
快速指南
快速使用指南
クイックガイド
요약 안내서

SENNHEISER




Sennheiser electronic GmbH & Co. KG
Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com
Printed in Germany, Publ. 12/20, 587440 /A01

In the box




or

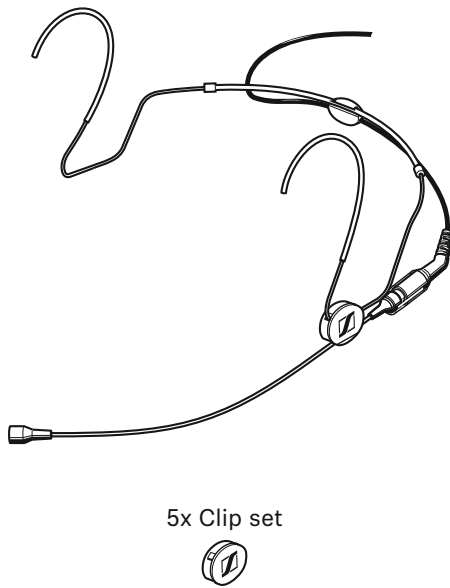

Frequency caps




Setup

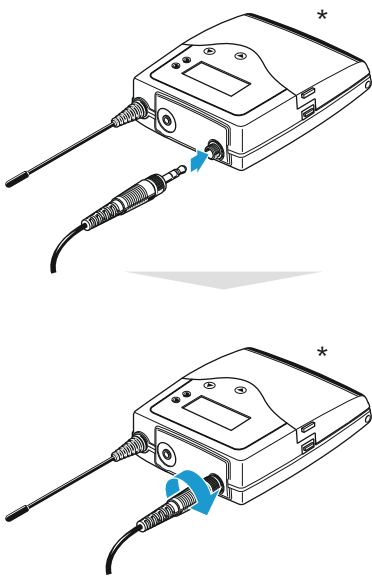

*optional accessories

Frequency cap

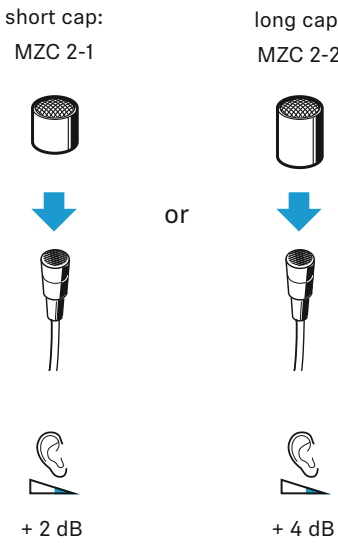

Accessory




Windshields

MZW 2*



- 20 dB
MZW 2*

MZW 02*




- 30 dB
MZW 2* + MZW 02*


*optional accessories

Setup


1

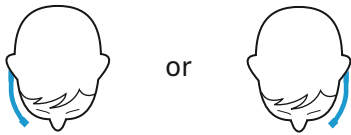


2




3




4

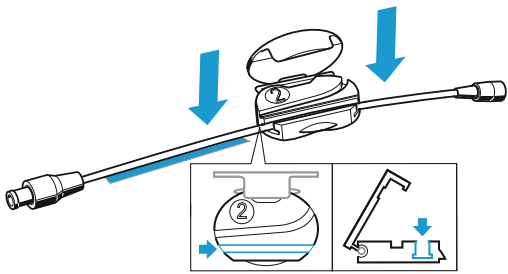


5

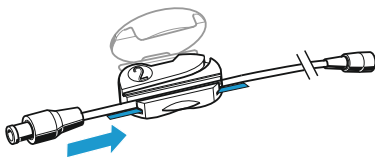




6

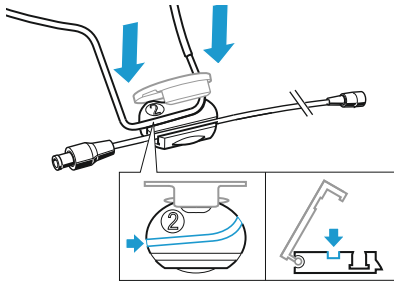

7

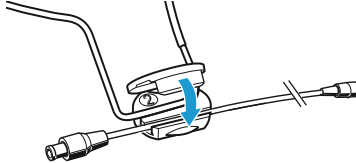


Use

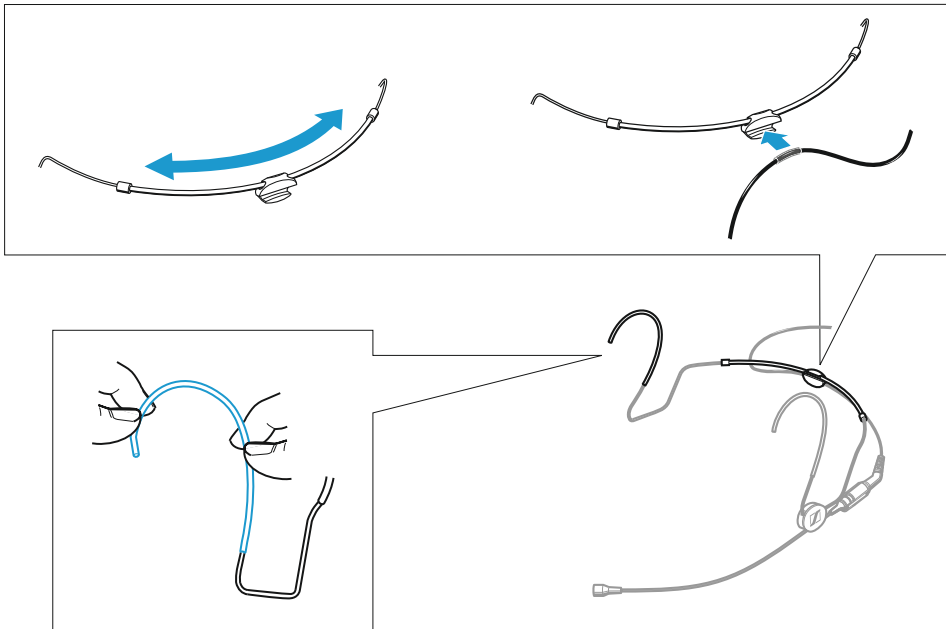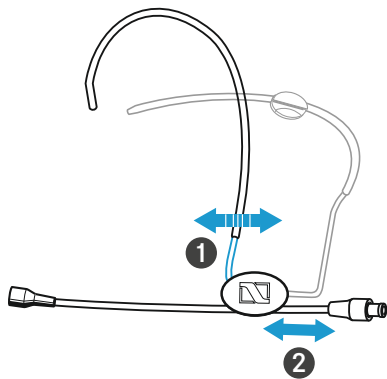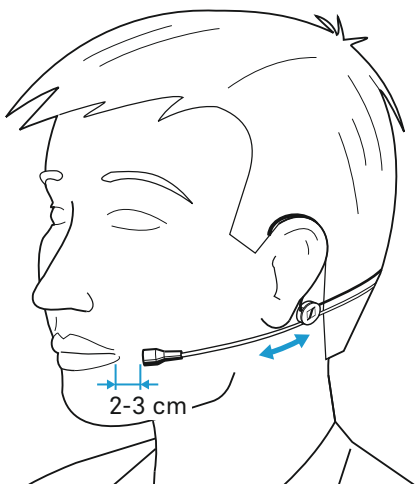


Cleaning




1





2




3



4

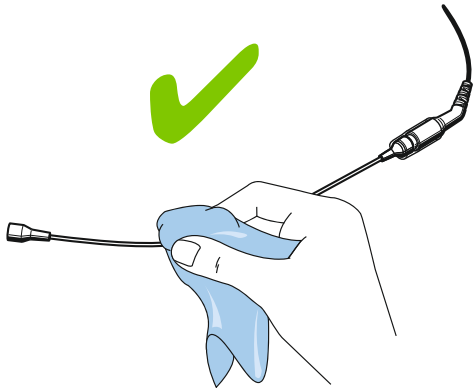

Polar pattern

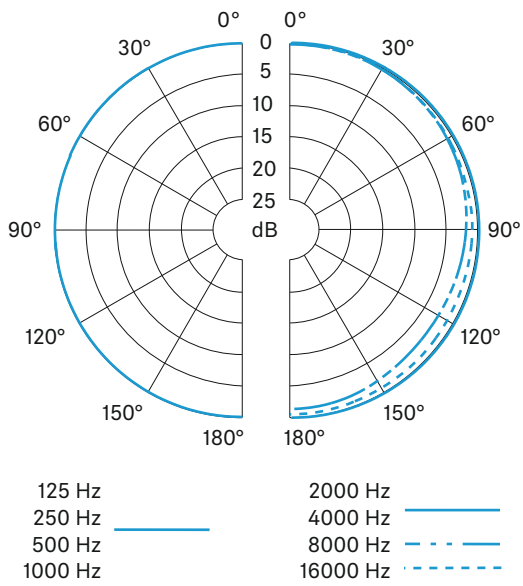

Specifications

Frequency response	20 – 20,000 Hz ±3 dB
Pick-up pattern	omni-directional
Nominal impedance	1 kΩ
Min. terminating impedance	4.7 kΩ
Sensitivity	2 mV/Pa ±3 dB
Diameter of mic capsule	4.8 mm
Max. sound pressure level	150 dB
Equivalent noise level	28 dB(A)
Supply current	approx. 250 µA
Power supply	4.5 – 15 V
Temperature range	-10 °C to +50 °C
Cable length	1.6 m
Diameter of boom arm	1.1 mm
Weight	2.1 g
Connector	3.5 mm jack plug or 3-Pin connector

Neckband	
Width	110 mm
Weight	4.4 g

Frequency response

